



SECTION 1 – IDENTIFICATION

Product: ESR SERIES PERFORMANCE™ PRE-CATALYZED TOPCOAT
Product Use: HIGH PERFORMANCE PRE-CATALYZED TOPCOAT
..... FOR INDUSTRIAL USE ONLY

Manufacturer/Supplier: KATILAC COATINGS INC.
391 HANLAN ROAD, UNIT #1, WOODBRIDGE, ONTARIO L4L 3T1
Phone: 905-856-6464 (Monday-Friday 8:00-4:00)
840 APPLEBY LINE, BURLINGTON, ONTARIO L7L 2Y7
Phone: 905-637-2931 (Monday-Friday 8:00-4:00)
www.katilaccoatings.com


SECTION 2 – HAZARDS IDENTIFICATION

GHS Classification:

Flammable Liquids (Cat. 2)
Skin Irritation (Cat. 2)
Serious Eye Damage (Cat. 1)
Carcinogenicity (Cat. 2)
Reproductive Toxicity (Cat. 2)
Specific Target Organ Toxicity- Single Exposure (Cat. 3) - Central Nervous System
Specific Target Organ Toxicity- Single Exposure (Cat. 2) - Ingestion may damage optic nerve
Specific Target Organ Toxicity - Repeated Exposure (Cat. 2) - Liver, Kidney, Nervous System, Auditory System
Aspiration Hazard (Cat. 1)

GHS Label Elements:

Pictogram:

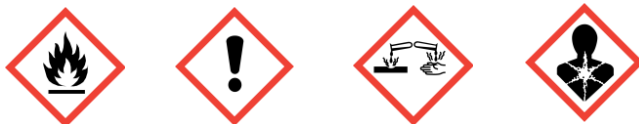

Signal Word: Danger

Target Organs:

Central nervous system, reproductive system, eyes, optic nerve, skin, auditory.

Safety Data Sheet - ESR SERIES PERFORMANCE™ PRE-CATALYZED TOPCOAT

Hazard Statement(s):

H225: Highly flammable liquid and vapour.

H315: Causes skin irritation.

H318: Causes serious eye damage.

H351: Suspected of causing cancer.

H361: Suspected of damaging fertility or the unborn child.

H336: May cause drowsiness or dizziness.

H371: May cause damage to organs.

H373: May cause damage to organs through prolonged or repeated exposure.

H304: May be fatal if swallowed and enters airways.

Precautionary Statement(s):

P201: Obtain special instructions before use.

P202: Do not handle until all safety precautions have been read and understood.

P210: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

P233: Keep container tightly closed.

P240: Ground and bond container and receiving equipment.

P241: Use explosion-proof electrical, ventilating, lighting and equipment.

P242: Use non-sparking tools.

P243: Take action to prevent static discharges.

P280: Wear protective gloves, protective clothing, eye protection.

P362+P364: Take off contaminated clothing and wash it before reuse.

P264: Wash skin thoroughly after handling.

P260: Do not breathe dust, fumes, mist, vapours or spray.

P271: Use only outdoors or in a well-ventilated area.

P270: Do not eat, drink or smoke when using this product.

P303+P361+P353: IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water.

P302+P352: IF ON SKIN: Wash with plenty of water.

P332+P313: If skin irritation occurs: Get medical attention.

P305+P351+P338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P310: Immediately call a POISON CENTER or physician.

P304+P340: IF INHALED: Remove person to fresh air and keep comfortable for breathing.

P312: Call a POISON CENTER or doctor if you feel unwell.

P308+P311: IF exposed or concerned: Call a POISON CENTER or doctor.

P301+P310: IF SWALLOWED: Immediately call a POISON CENTER.

P331: Do NOT induce vomiting.

P403+P235: Store in a well-ventilated place. Keep cool.

P405: Store locked up.

P370+P378: In case of fire: Use foam, water fog, dry chemical and/or carbon dioxide to extinguish.

P501: Dispose of contents and container to comply with local, provincial, state, and federal regulations.

SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS

HAZARDOUS INGREDIENT	CAS NUMBER	% wt/wt
Xylene	1330-20-7	10.00-30.00
Ethyl Benzene	100-41-4	1.00-5.00
Acetone	67-64-1	10.00-30.00
Methanol	67-56-1	1.00-5.00
Ethanol	64-17-5	5.00-10.00
Butanol	71-36-3	1.00-5.00
n-Butyl Acetate	123-86-4	10.00-30.00
2-methoxy-1-methylethyl Acetate	108-65-6	1.00-5.00
Nitrocellulose	9004-70-0	5.00-10.00
Isopropanol	67-63-0	1.00-5.00
Urea P/W Formaldehyde, isobutylated	68002-18-6	1.00-5.00
Isobutanol	78-83-1	1.00-5.00
Melamine P/W Formaldehyde, butylated	68002-25-5	1.00-5.00

SECTION 4 – FIRST-AID MEASURES**Inhalation:**

This product is (extremely) flammable. Take proper precautions (e.g. remove any sources of ignition). If breathing is stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, immediately start cardiopulmonary resuscitation (CPR) or automated external defibrillation (AED). Quickly transport victim to an emergency care facility.

Ingestion:

Never give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Do not induce vomiting. Have victim drink 60-240 mL (2-8 oz.) of water. If vomiting occurs naturally, have victim rinse mouth with water again. Obtain medical advice.

Eyes:

Quickly and gently blot or brush chemical off the face. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for at least 30 minutes, while holding the eyelid(s) open. If a contact lens is present, do not delay irrigation or attempt to remove the lens. Neutral saline solution may be used as soon as it is available. Do not interrupt flushing. If necessary, continue flushing during transport to emergency care facility. Take care not to rinse contaminated water into the unaffected eye or onto face. Quickly transport victim to a emergency care facility.

Skin:

As quickly as possible, remove contaminated clothing, shoes, and leather goods (e.g. watchbands, belts). Immediately flush with lukewarm, gently flowing water for 15-20 minutes. If irritation persists, repeat flushing. Obtain medical advice. Completely decontaminate clothing, shoes and leather goods before reuse or discard.

Most Important Symptoms and Effects:

May cause central nervous system (CNS) depression. CNS depression is characterized by headache, dizziness, nausea, vomiting and incoordination. Contains Methanol. Cannot be made non-poisonous. Swallowing even small amounts of Methanol can cause blindness.

Indication of Immediate Medical Attention and Special Treatment:

Treatment based on sound judgement of physician and individual reactions of patient.

SECTION 5 – FIRE-FIGHTING MEASURES**Suitable and Unsuitable Extinguishing Media:**

Carbon dioxide, alcohol-resistant foam, water fog, dry chemical. Do not use water jet.

Safety Data Sheet - ESR SERIES PERFORMANCE™ PRE-CATALYZED TOPCOAT

Specific Hazards Arising from the Product:

Vapours and/or fumes from this product are heavier than air and may travel to a source of ignition and flash back causing explosion and fire. Never use welding or cutting torch on, or near drum (even empty) as product (even residue) can ignite explosively. All containers, including pails, drums, tank cars & trucks should be grounded and/or bonded when material is transferred. In accordance with North American fire and occupational safety regulations—including the National Fire Code of Canada (NFC) Part 4, NFPA 30 (Flammable and Combustible Liquids Code), and OSHA 29 CFR 1910.106—all materials classified as Class 3 Flammable Liquids (including Packing Groups I, II, and III) are strictly prohibited from being stored, handled, or used in basements, pits, or sub-grade areas. Ensure all potential sources of ignition—including heat, sparks, open flames, hot surfaces, and static discharge—are eliminated. These materials produce vapors heavier than air which accumulate in low-lying, poorly ventilated spaces, creating a severe risk of fire and explosion. Use only non-sparking tools and explosion-proof electrical equipment in handling areas.

Hazardous Combustion Products:

Carbon monoxide and/or carbon dioxide. Silicone compounds, formaldehyde, nitrogen oxide, ammonia.

Special Fire Fighting Procedures:

Use water spray to cool fire-exposed containers or structures. Keep upwind of fire. Wear self-contained breathing apparatus and full protective gear.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures:

Use personal protective equipment recommended in Section 8. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations.

Methods and Materials for Containment and Clean Up:

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Contain and dike spills. Absorb with inert material, place in a suitable container. Report and dispose of according to local regulations.

SECTION 7 – HANDLING AND STORAGE

Precautions for Safe Handling:

Use in a well-ventilated area. Avoid contact with skin and eyes. Avoid inhalation of vapour or mist. Use explosion-proof tools, equipment, and ventilation system. Keep away from sources of ignition. Take measures to prevent the build-up of electrostatic charge. Always ground and bond containers.

Conditions for Safe Storage:

Keep container tightly closed in a dry and well-ventilated area. Containers which are opened must be carefully resealed and kept upright to prevent leakage and evaporation. Avoid extreme temperatures.

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

Threshold Limit Value:

100 ppm ACGIH est. (Xylene)
20 ppm ACGIH est. (Ethyl Benzene)
1000 ppm ACGIH est. (Ethanol)
200 ppm ACGIH est. (Methanol)
50 ppm ACGIH est. (Butanol)
50 ppm ACGIH est. (n-Butyl Acetate)
50 ppm ACGIH est. (Isobutanol)

Engineering Controls:

Use local, mechanical, explosion proof exhaust and/or ventilation system to avoid exposure and vapour accumulation. Maintain exposure limits below the recommended thresholds.

Safety Data Sheet - ESR SERIES PERFORMANCE™ PRE-CATALYZED TOPCOAT

Personal Protective Equipment:

Respiratory Protection:

Where risk assessment shows air-purifying respirators are appropriate, use an approved respirator for the concentration and type of hazardous materials in the workplace. Use respirators and components tested and approved under the appropriate government standards. Use respirators as backup to engineering controls if necessary.

Hand Protection:

Handle with gloves to minimize skin contact. Inspect gloves prior to use. Use proper glove removal technique (without touching the glove's outer surface) to avoid skin contact with product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash hands thoroughly.

Eye Protection:

Safety glasses with side shields and/or face shield. Use equipment for eye protection tested and approved under the appropriate government standards.

Protective Clothing:

Impervious clothing, flame retardant, antistatic protective clothing. The type of protective equipment should be selected according to the concentration and amount of hazardous materials at each specific workplace.

Additional Measures:

Handle in accordance with good industrial hygiene and safety practices. Wash hands before breaks and at the end of the workday. Do not eat, smoke or drink where material is handled, processed or stored.

SECTION 9 – PHYSICAL / CHEMICAL PROPERTIES

Physical State: Liquid
Colour/Odour: Clear to hazy with solvent odour
Melting/Freezing Point: Not available
Boiling Point: 56°C est. (Acetone)
Flammability: Not available
Upper Flammable Limit: 19-36% est.
Lower Flammable Limit: 1.00% est.
Flashpoint: -16.99°C C.C. est. (Acetone)
Autoignition Temp: 318-355°C est.
Decomposition Temp: Not applicable based on normal workplace conditions
pH: Not available
Viscosity (kinematic): 19-21 seconds @ 25°C Ford #4
Solubility in Water: Not soluble
Partition Coefficient: n-octanol/water (logarithmic value) Not available
Vapour Pressure: Not available
Density: 0.9292 +/- 0.01 gms/cc @ 25°C
Vapour Density (AIR=1): Heavier than air
Particle Characteristics: Not applicable
Evaporation Rate: Not available
% Non-Volatile: 25% +/- 2 w/w

SECTION 10 – STABILITY AND REACTIVITY

Reactivity:

No data.

Chemical Stability:

Stable, except under fire conditions.

Possibility of Hazardous Reactions:

No hazardous reactions expected under normal handling conditions.

Safety Data Sheet - ESR SERIES PERFORMANCE™ PRE-CATALYZED TOPCOAT

Conditions to Avoid:

Heat, flames and sparks, static / static discharge.

Incompatible Materials:

Strong oxidizing agents, acids, bases and reducing agents, nitrogens. Halogens and halogenated compounds, metal salts, ammonia, potassium tert-butoxide, phosphorous oxychloride, alkalis, amines.

Hazardous Decomposition Products:

Occurrence of decomposition products depend on temperature, air supply and presence of other materials. Carbon monoxide and/or carbon dioxide. Acetic acid, butanol, nitrogen oxide, ammonia, formaldehyde.

SECTION 11 – TOXICOLOGICAL INFORMATION

HAZARDOUS INGREDIENT	LD50	LC50	HRS
Xylene	3523 mg/kg	27.56 mg/L	4
Ethyl Benzene	3500 mg/kg	17.4 mg/L	4
Acetone	5800 mg/kg	76 mg/L	4
Methanol	5628 mg/kg	83.8 mg/L	4
Ethanol	7060 mg/kg	61 mg/L	4
Butanol	790 mg/kg	17.8 mg/L	4
n-Butyl Acetate	10760 mg/kg	160-2000 ppm	4
2-methoxy-1-methylethyl Acetate	8532 mg/kg	not available	-
Nitrocellulose	>5000 mg/kg	not available	-
Isopropanol	>5840 mg/kg	30 mg/L	4
Urea P/W Formaldehyde, isobutylated	>2000 mg/kg	5 mg/L	4
Isobutanol	2460 mg/kg	>8000 ppm	4
Melamine P/W Formaldehyde, butylated	>5000 mg/kg	not available	-
.	.	13.49% of total product has unknown toxicity	.

Likely Routes of Exposure:

Skin: Can be absorbed. Irritation, redness, burning sensation, drying, and cracking.

Eyes: Can cause eye irritation. Stinging, tearing, redness, and swelling.

Inhalation: Can cause central nervous system depression.

Ingestion: Harmful, may enter lungs. May cause blindness.

Skin corrosion/irritation:

Rabbit - skin irritation - 24 hour

Serious eye damage/irritation:

A component of this product tested: Rabbit - blindness - OECD test guideline 405

Respiratory or skin sensitization:

Not classified as a sensitization hazard.

Germ cell mutagenicity:

Not expected to be mutagenic in humans.

Carcinogenicity:

IARC has classified Ethyl Benzene as a possible human carcinogen, Group 2B.

Reproductive toxicity:

Excessive exposure during pregnancy may be hazardous to the developing fetus. May cause fetotoxic effects both in the presence and absence of maternal toxicity, based on animal studies.

Teratogenicity:

May cause teratogenic/embryotoxic effects at levels which are not maternally toxic.

Specific target organ toxicity (single exposure):

May cause central nervous system depression. Ingestion may cause damage to the optic nerve.

Safety Data Sheet - ESR SERIES PERFORMANCE™ PRE-CATALYZED TOPCOAT

Specific target organ toxicity (repeated exposure):

Classified as a repeat exposure hazard.

Aspiration hazard:

Classified as an aspiration hazard.

Potential Health Effects:

Inhalation:

Excessive inhalation of vapours can cause nasal and respiratory irritation and central nervous system effects, including dizziness, weakness, fatigue, nausea, headache, blurred vision and possible unconsciousness.

Ingestion:

May cause gastrointestinal irritation, nausea, vomiting, diarrhea, headache, dizziness, fatigue, and central nervous system depression. Contains Methanol. Cannot be made non-poisonous. Swallowing even small amounts of Methanol can cause blindness and damage to the optic nerve.

Skin:

Prolonged or repeated contact may dry the skin and cause defatting and dermatitis. Symptoms may include redness, burning sensation, drying and cracking of skin.

Eyes:

May cause severe irritation, redness, tearing, blurred vision. Can cause corneal injury.

Signs and Symptoms of Exposure:

Adverse exposure risks are minimized and no health effects are anticipated when facility operations adhere to established regulatory parameters and all engineering and safety controls are fully implemented. Can cause central nervous system effects, including dizziness, weakness, fatigue, nausea, headache, blurred vision and possible unconsciousness.

Additional Information:

May cause central nervous system (CNS) depression. CNS depression is characterized by headache, dizziness, nausea, vomiting and incoordination. Contains Methanol. Cannot be made non-poisonous. Swallowing even small amounts of Methanol can cause blindness.

SECTION 12 – ECOLOGICAL INFORMATION

Ecotoxicity:

LC50 (Oncorhynchus Mykiss) 8.2 mg/L, 96H est. (Xylene)

LC50 (Oncorhynchus Mykiss) 4.2 mg/L, 96H est. (Ethyl Benzene)

LC50 (Pimephales Promelas) 6210 mg/L, 96H, OECD Test Guideline 203, est. (Acetone)

LC50 (Lepomis Macrochirus) 15400 mg/L, 96H, est. (Methanol)

LC50 (Pimephales Promelas) 1376 mg/L, 96H, OECD Test Guideline 203, est. (Butanol)

LC50 (Pimephales Promelas) 18 mg/L, 96H, OECD Test Guideline 203, est. (n-Butyl Acetate)

LC50 (Pimephales Promelas) 9640 mg/L, flow-through, 96H, OECD Test Guideline 203, est. (Isopropanol)

LC50 (Pimephales Promelas) >10000 mg/L, 96H, est. (Nitrocellulose)

LC50 (Oncorhynchus Mykiss) 1120-1520 mg/L, 96H, est. (Isobutanol)

Persistence and Degradability:

No data.

Bioaccumulative Potential:

No data.

Mobility in Soil:

No data.

Other Adverse Effects:

May be toxic to aquatic life with potentially long lasting effects. Prevent from entering drains, sewers, streams or other bodies of water. If runoff occurs, notify authorities as required.

SECTION 13 –DISPOSAL CONSIDERATIONS

Waste Disposal:

Collect and reclaim or dispose in sealed containers at a licensed waste disposal site. Do not allow this material to drain into sewers/water supplies. Dispose of in accordance with all applicable regulations.

Contaminated Packaging:

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since empty containers may retain product residue, follow any label warnings even after container is emptied.

SECTION 14 – TRANSPORTATION INFORMATION

TDG Classification (Ground Only):.....CLASS 3 UN1263 II

Proper Shipping Name (Ground Only):PAINT

A scientific determination was concluded based on formulation ingredients on July 28, 2026 to define the Transportation of Dangerous Goods Classifications.

SECTION 15 - REGULATIONS

This material is included on the DLS (Canadian Domestic Substance List) under the CEPA (Canadian Environmental Protection Act).

This material has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the SDS contains all of the information required by CPR.

This material meets TSCA (Toxic Substances Control Act) inventory requirements.

Contents of this SDS comply with the OSHA Hazard Communication Standard 29CFR 1910.1200

SECTION 16 – OTHER INFORMATION

Revision Date:..... July 28, 2026

Print Date:..... July 28, 2026

Version Number:..... 4

LEGEND TO ABBREVIATIONS:

CAS: CHEMICAL ABSTRACT SERVICES

IARC: INTERNATIONAL AGENCY FOR RESEARCH ON CANCER

LC: LETHAL CONCENTRATION

LD: LETHAL DOSE

TDG: TRANSPORTATION OF DANGEROUS GOODS

TLV: THRESHOLD LIMIT VALUE

VOC: VOLATILE ORGANIC COMPOUND

The information contained in this form is based on data from sources considered to be reliable but Katilac Coatings Inc. does not guarantee the accuracy or completeness thereof. The information is provided as a service to persons purchasing or using the material to which it refers and Katilac Coatings Inc. expressly disclaims all liability for loss or damage, including consequential loss, or for injury to persons (including death) arising directly or indirectly from reliance upon the information or use of the material.